



DEXCOWIN



THE LEADER IN PORTABLE X-RAYS AND
DIGITAL SENSORS INNOVATIONS

REX² PREMIUM

(Digital Intra Oral Sensor CMOS)

SAME SIZE WITH DEXIS



SIZE #2.0

WE CUT THE CORNERS OFF THE EDGES AND APPLIED A WATERPROOF RUBBER COVER TO REDUCE PAIN



THINNER THAN COMPETITOR*



USB DIRECT INTERFACE

Why Should I Go Digital?

SAVE MONEY

Get huge overall savings by eliminating the cost and hassle of periodic film and film developing related purchases.

SAVE SPACE

Do away with dark rooms and increase overall productivity by reutilizing that valuable real estate.

SAVE TIME

No more time spent needlessly developing film. Instant digital capturing allows you to immediately diagnose your patient.

MORE TIME FOR PATIENTS EQUALS MORE BUSINESS FOR YOU!

Why Pay more for less?

- › MUCH CHEAPER - Half price with same, if not better image quality.
- › HIGH RESOLUTION - Never sacrifice price for quality again.
- › SAFETY - Highly sensitive, great image at a low dose of radiation.
- › CABLE DURABILITY - 25K Times Cable Bending Test.
- › HIGH COMPATIBILITY - Compatible with Dexis, Kodak, eagleSoft etc..
- › LOW MAINTENANCE COST - Free Signature Customer Support.

One Click FMX

Compatible with **Dexis 8-9-10, Schick, Kodak, XDR, DentiMax, Suni . . .**

- › **THE AUTO FMX FUNCTION ALLOWS YOU TO:**
 - › Select all teeth you want to x-ray prior to series shot
 - › Capture the x-rays without going back to your pc
 - › X-Rays will be stored & teeth numbered automatically
- › **REPLACES THE BELOW SENSORS AND MUCH MORE..**
 - › Dexis sensor
 - › Schick sensor
 - › Suni Sensor
 - › XDR sensor
 - › KODAK sensor
- › **NO NEED FOR NEW SOFTWARE, YOU ONLY NEED THE SENSOR**
 - › No extra software and retraining costs or hassle

Same Size as Dexis, Just Thinner




SPECIFICATION

- > Scintillator Csl : TL with FOP
- > Active Area :
 - > Size 1.5: 24.0 x 33.0 mm
 - > Size 2.0: 26.0 x 36.0 mm
- > Active Pixels :
 - > Size 1.5: 1,200 x 1,650px
 - > Size 2.0: 1,300 x 1,800px
- > Pixel Pitch :20 μm
- > Limiting Resolution Real Resolution : 18 lp/mm
- > A/D Conversion 12 bits
- > Frame Rate Static
- > Interface Direct USB
- > Energy Range 50~100 kV
- > Cable Length : 3m
- > Dimension(W x L x H) :
 - > Size 1.5: 29.2 x 38.7 x 4.95 mm
 - > Size 2.0: 31.5 x 42.8 x 4.95 mm

WARRANTY PLAN

- > 1 year manufacturer warranty
- > 5 years reduced cost replacement plan

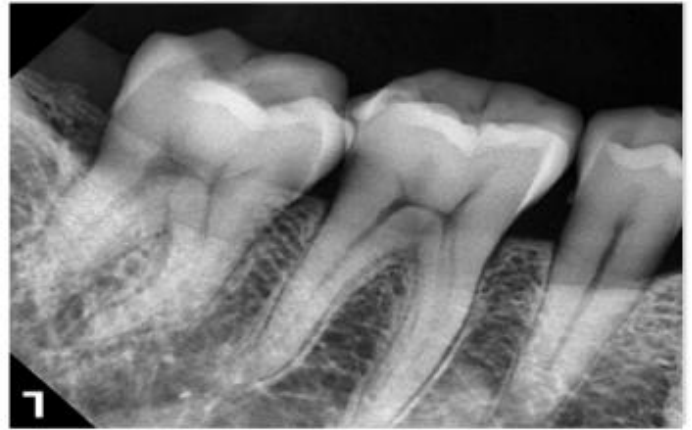

Dexcowin Global
155 N. Lake Ave. Pasadena, CA 91101
Tel: 800-587-3070 Fax 626-993-6601
info@dexcowin.com

DEXCOWIN